



Accessing your Nokia 6230b Motherboard

This guide will show how to access the motherboard within your Nokia 6230b phone.

Written By: Spencer Lines



INTRODUCTION

These steps will show how to remove some of the panels within your phone in order to access your motherboard and your phone's other inner components.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Motherboard



- Using a T6 Torx Screwdriver, unscrew and remove the six screws shown in the picture.

Step 2



- Remove the panel that covers the motherboard.


i If replacing the speaker, stop at this step and skip forward to the first step of the speaker guide.

Step 3



- Remove the LCD screen frame.

Step 4

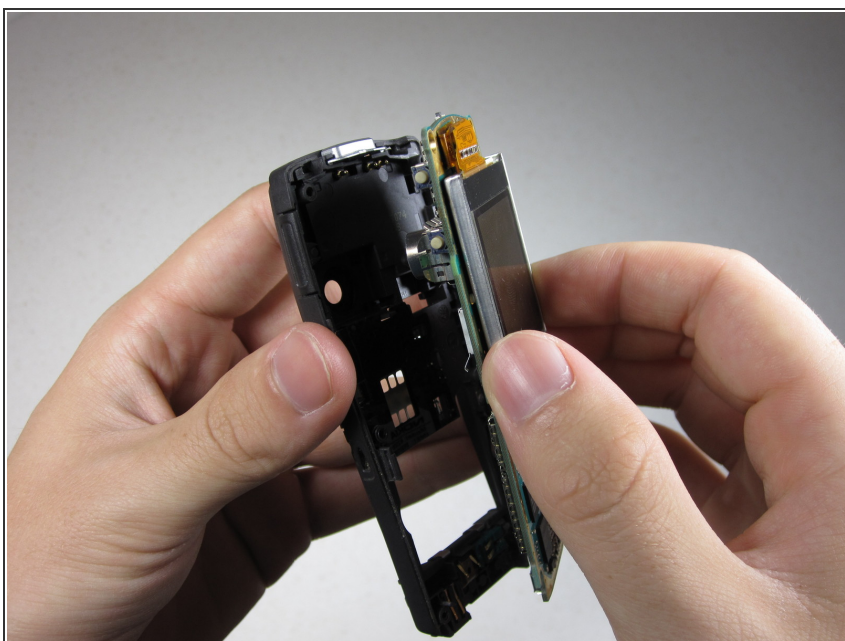

- Remove the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-14 02:04:01 PM.